





**37A_S Serial-18.5", 21.5", 23.6",
37A_B Serial-31.5", 43", 49" 55"
PCAP Touch Screen Signage**



VESA: 100 X 100

37A_S: 18.5", 21.5" & 23.6"

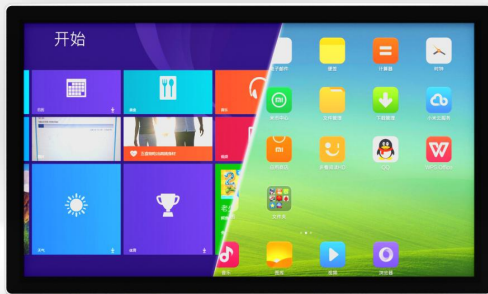

37A_B: 31.5", 43", 49" & 55"

PCAP Touch Screen structure

TDS 37A Serial Touch Screen Feature:

- 10 Points PCAP Touch Technology
- Slim Touch Display thickness
- VGA+HDMI interface, support internal or external computer
- VESA Mounting: 100 X100(<31.5") or 200 X 200 (>31.5")
- Support OS: Windows, Linux, Chrome, Android & Mac

TDS 37A Serial PCAP Touch Screen Signage

Specification

Display Size	18.5", 21.5", 23.6", 31.5", 43", 49" & 55"
Bezel Color	Black
Display Technology	Full HD 1920 X 1080 @ 60HZ LED
Mounting Options	VEST 4-Hole mount per MIS-F, 100, 200
Aspect Ratio	16:9
Number of Colors	16.7 Million
Brightness	LED Panel 250nits-500nits
Viewing Angle	Horizontal: ±89°C/179°C, Vertical: ±89°C/179°C
Contrast Ratio	1000:1~4000:1
I/O Ports	Input: AC Power input, USB, HDMI, DisplayPort, Audio Line-in Output: Audio Headphones out, RJ45
Number of Touch	10 Points
Touch Accuracy	±2mm (over 90% Area)
Response Time	<12ms
Touch Input Method	Finger, Finger of gloved hand, Stylus
Light Transmittance	≤93%
Resolution	4096 X 4096
Protective Glass	3mm, AG Glass is option

Electrical

Communication	USB2.0 Full Speed
Power Supply Mode	American Standard
Supply Voltage	DC12V

Environmental

Operating Temperature	-0° to 50°C
Humidity	10%-85%RH, No Condensing
Controller Temperature	-20° to 60°C

Software

Multi Touch	Windows 7 /8/10, Linux, Chrome, Android
Warranty	1-Year

Contact US

TDS Touch
US HECHUANG Technology
Unit C-1, 2080 Walsh Ave,
Santa Clara, CA 95050

Tel: 1-408-688-2658
Email: info@tdstouch.com
Web: www.ustdstouch.com