

# 1538C 16:9 PCAP

## Open-Frame Touchscreen




### Feature:

- + Metal shell, open frame structure
- + Stepped edge of front frame, easy to integrate
- + Bezels and touch screen sealed and waterproof
- + Commercial grade LCD, LED backlight
- + Resolution 1920X1080@60Hz
- + Widescreen ratio full viewing angle display
- + 10-point projection capacitive touchscreen
- + Cover plate anti riot and anti fingerprint
- + Reliable Industrial Grade Components
- + Video interface: HDMI+VGA
- + Multiple assembly holes on the side and back
- + Support OS: Windows/Android/Linux
- + 2-Year warranty



### Optional:

- No Touch
- Privacy Filter
- AG Coating
- Video interface: DP
- Brightness: 500-1000nits

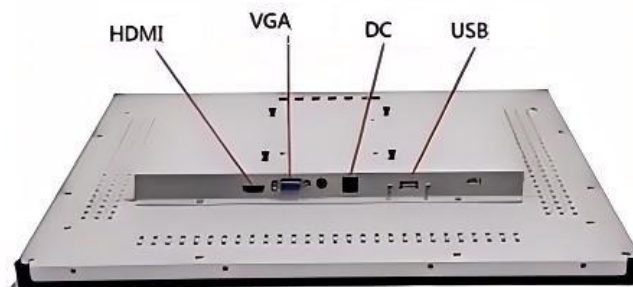

## TDS1538C Open Frame Touchscreen Specifications

Model	1538C
Color	Black/Silver
Diagonal	15.6"
Aspect Ratio	16:9
Active Area	344.16X193.59(mm)
Dimensions	387X236.3X40(mm)
Resolution	1920X1080@60Hz
Viewing Angle	Horizontal: 85° /85°; Vertical: 85° /85°
Number of Colors	16.7M
Brightness (typical)	LCD panel:300nits; PCAP:275 nits
Response Time	30ms
Contrast Ratio	1000:1
Touch Technology	PCAP (Projected Capacitive) - 10 Touch
Input method	Finger, Capacitance pen(Standard) Latex gloves touch (pre commissioning required)
Transmittance	≥90%
Surface hardness	7H(Mohs)
Touch Interface	USB 2.0
Video Interface	VGA+HDMI
Input Voltage	AC: 100-240 VAC,50/60 Hz
Sealability	Touchscreen sealed to bezel
Drop Test	450g steel ball falls from 1.0m without breaking
Weight (net.)	3KG
Shipping Dimensions	520X340X135(mm)
Operating Temperature	0°C to 40°C
Storage Temperature	-20°C to 60°C
Humidity	Operating: 20% to 70%; Storage: 10% to 80%
Mounting Options	VESA holes: 75mm&75mm,100mm&100mm Four sides has a set of fixing holes: 142mm
MTBF	30,000 hours demonstrated
Power Supply	DC:12V3A
Warranty	2-year
Agency Approvals	FCC, CE, ROHS
Support OS	Windows/Linux\Android
What's in the Box	1*USB cable, 1*HDMI cable, 1*DC cable (Standard) L" (Side Mount) Brackets and w/Screws (Options)

