

1039C 16:10 PCAP

Open Frame Touchscreen



Features

- + Metal shell, open frame design
- + Flat and zero bezel appearance
- + Commercial grade LCD, LED backlight
- + Resolution 1280X800@60Hz
- + Widescreen full viewing Angle
- + Supports vertical and horizontal
- + 10-point projection capacitive touchscreen
- + Cover plate anti riot and anti fingerprint
- + Video interface: HDMI+VGA
- + Multiple assembly holes on the side and back
- + Support OS: Windows/Android/Linux
- + 2-year Warranty




Optional:

- No Touch
- Private Filter
- AG+UV Coating
- Brightness customized: 500-1000nits
- Touch interface: RS232
- Video interface: Display Port

TDS1039C Open-Frame Touchscreen Specifications

Model	1039C
Color	Black/Silver
Diagonal	10.1”
Aspect Ratio	16: 10
Active area	216.96X135.6(mm)
Dimensions	258.2X180.8X37 (mm)
Resolution	1280X800@60Hz
Viewing Angle	Horizontal: 85°/85° Vertical: 85°/85°
Number of Colors	16.7M
Brightness	LCDPanel:350nits;PCAPTTouch:315nits
Contrast Ratio	800:1
Response Time	25ms
Touch Technology	PCAP (Projected Capacitive) - 10 Touch
Input method	Finger, Capacitance pen(Standard) Latex gloves touch (pre commissioning required)
Transmittance	≥90%
Surface hardness	6H(Mohs)
Touch Interface	USB 2.0
Video Interface	VGA+HDMI
Input Voltage	AC: 100-240 VAC,50/60 Hz
Sealability	Touchscreen sealed to bezel
Drop test	200g steel ball falls from 0.8 m without breaking
Weight(Unpackage)	1.5KG
Shipping Dimensions	350X20X140(mm)
Operating Temperature	0°C-40°C
Storage Temperature	-20°C-60°C
Humidity	Operating: 20%-70%;Storage: 10%-80%
Mounting Options	VESA Hole on the back: 75X75 (mm) Four sides has a set of fixing holes: 65mm
MTBF	30,000 Hours
Power Supply	DC:12V3A
Warranty	2-Year
Agency Approvals	FCC; CE; ROHS
Support OS	Windows/Android/Linux
What's in the Box	1*USB cable,1*HDMI cable,1*DC cable,1*RJ OSD Remote(Standard) L” (Side Mount) Brackets and w/Screws(Options)

TDS1039C-PCAP

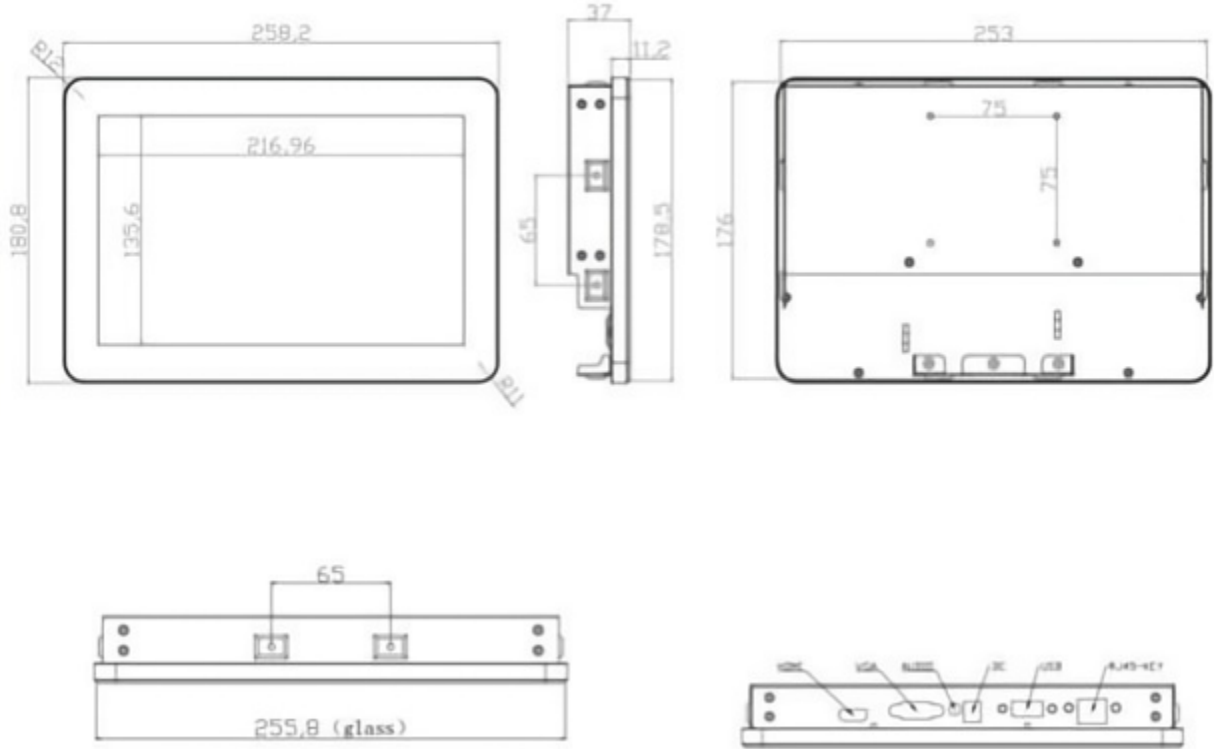

Dimensions are in millimeters

