

TDS1039L 16:10 (Light bar)

Open-Frame Touchscreen



Features

- + Metal shell, open frame design
- + Flat and zero bezel appearance
- + Commercial grade LCD, LED backlight
- + Resolution 1280X800@60Hz
- + 10-point projection capacitive touchscreen
- + There are colored light bars all around
- + Optional single and multi-color light bars
- + COB light bar with soft and even lighting
- + Support OSD key and serial port control mode
- + Various marquee modes, Colors and speed can be adjusted
- + Video interface: HDMI+VGA
- + Multiple assembly holes on the side and back
- + Support OS: Windows/Android/Linux
- + 2-year Warranty






Optional:

- No Touch
- AG Coating
- Video interface: Display Port
- All-in-one(Built in motherboard)



| TDS1039L Open-Frame Touchscreen Specifications(light bar) | |
|-----------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Model | 1039L |
| Color | Black/Silver |
| Diagonal | 10.1"/16:10 |
| Active area | 216.96X135.6(mm) |
| Dimensions | 258.2X180.8X37 (mm) |
| Resolution | 1280X800@60Hz |
| Viewing Angle | Horizontal: 85°/85° Vertical: 85°/85° |
| Number of Colors | 16.7M |
| Brightness | LCD Panel: 300nits; PCAP Touch: 275 nits |
| Contrast Ratio | 800 : 1 |
| Touch Technology | PCAP(ProjectedCapacitive)-10 Touch |
| Surface hardness | 6H(Mohs) |
| Light bar | <p>Lighting mode: Standard:monochrome (Pink/Red/Yellow/Green/Orange /Ice Blue/ Blue/ White/) Optional:Multi-color(7 color rotation variations/Full color RGB rotation variation)</p> <p>Control mode : Standard:external control(OSD Key) Optional:Serial port control (Provides serial port communication protocol) Note:Both methods can be used at the same time, but serial port calls take priority.</p> <p>Width:3mm Lighting angle: 180° Working voltage: 5V Waterproof level: IP20</p> |
| Speaker | 2*2W(Optional) |
| I/O Interface | 1*USB 2.0,1*HDMI,1*VGA,1*DC , 1*COM (for light bar) |
| Input Voltage | AC:100-240 VAC, 50/60 Hz |
| Sealability | Touchscreen sealed to bezel |
| Mounting Options | Back VESA two groups of holes : 75mm&100mm Four sides has a set of fixing holes : 142mm |
| Drop Test | 200g steel ball falls from 0.8m without breaking |
| Weight (Unpackage) | 1.5KG |
| Shipping Dimensions | 350X20X140(mm) |
| Temperature | Operating: 0 °C to 40°C; Storage : -20°C to 60°C |
| Humidity | Operating: 20% to 70% ; Storage: 10% to 80% |
| MTBF | 30,000 Hours |
| Power Supply | DC:12V3A |
| What' s in the Box | 1*USB cable,1*HDMI cable,1*DC cable,1*RJ OSD Remote(Standard) L" (Side Mount) Brackets and w/Screws(Options) |
| Agency Approvals | FCC; CE; ROHS |

TDS1039L-PCAP

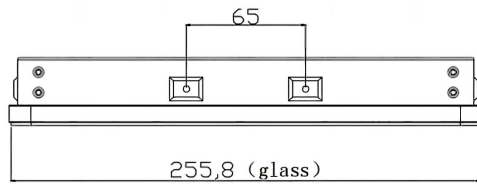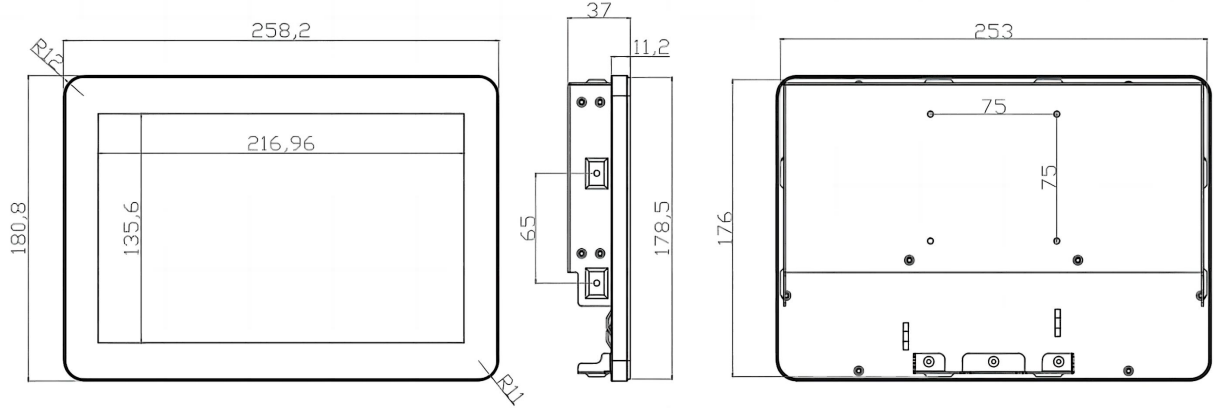

Dimensions are in millimeters

