

# 2139C 16:9 PCAP

## Open Frame Touchscreen



## Features

- + Metal shell, open frame design
- + Flat and zero bezel appearance
- + Commercial grade LCD, LED backlight
- + Resolution 1920X1080FHD@60Hz
- + Widescreen full viewing Angle
- + Supports vertical and horizontal
- + 10 point projection capacitive touchscreen
- + Cover plate anti riot and anti fingerprint
- + Removable OSD remote for easy use
- + Video interface: HDMI+VGA
- + Multiple assembly holes on the side and back
- + Support OS: Windows/Android/Linux
- + 3-years Warranty




## Optional

- No Touch
- Private Filter
- AG Coating
- Touch interface: RS232
- Video interface: Display Port

## TDS2139C Open-Frame Touchscreen Specifications

Model	2139C
Color	Black/Silver
Diagonal	21.5"
Aspect Ratio	16:9
Active Area	476.64X 268.11(mm)
Dimensions	515.4X310.8X45.9(mm)
Resolution	1920X1080FHD@60Hz
Viewing Angle	Horizontal: 89° /89°; Vertical: 89° /89°
Number of Colors	16.7M
Brightness	LCD panel : 300nits; PCAP : 275 nits
Contrast Ratio	1000:1
Response Time	14ms
Touch Technology	PCAP (Projected Capacitive) - 10 Touch
Input method	Finger, Capacitance pen(Standard) Latex gloves touch (pre commissioning required)
Transmittance	≥90%
Surface hardness	7H (Mohs)
Touch Interface	USB 2.0
Video Interface	HDMI+VGA
Input Voltage	AC: 100-240 VAC,50/60 Hz
Sealability	Touchscreen sealed to bezel
Drop test	1kg steel ball falls from 1.2m without breaking
Weight(Unpackage)	5.8KG
Shipping Dimensions	600X395X175(mm)
Operating Temperature	0°C-40°C
Storage Temperature	-20°C-60°C
Humidity	Operating: 20% to 70%; Storage: 10% to 80%
Mounting Options	VESA Hole on the back: 75mm&100 mm Four sides has a set of fixing holes: 200mm
MTBF	30,000 Hours
Power Supply	DC:12V3A
Warranty	3-Years
Agency Approvals	FCC; CE; ROHS
Support OS	Windows/Android/Linux
What's in the Box	1*USB cable,1*HDMI cable,1*DC cable,1*RJ45 OSD Remote (Standard) L" (Side Mount) Brackets and w/Screws (Options)

# TDS2139C-PCAP

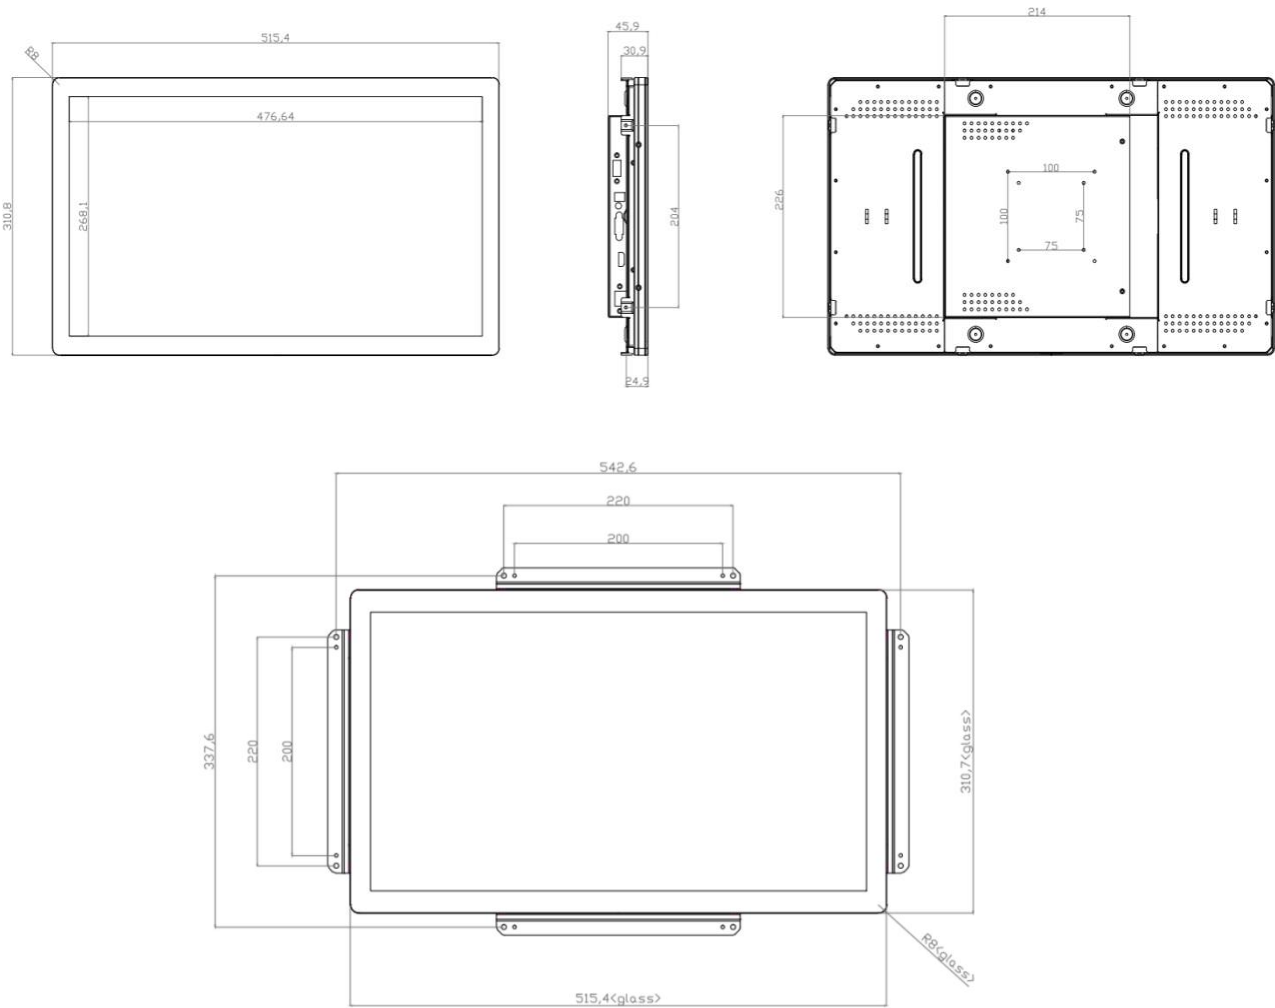

Dimensions are in millimeters

