

5502D 16:9 PCAP

Digital Signage Touch Monitor




Features

- + Metal shell material, flat and ultra-thin shape
- + Front frame against dust and liquids
- + Commercial grade LCD, LED backlight
- + Resolution 3840X2160UHD@60Hz
- + Wide ratio and full viewing Angle
- + 10 point projection capacitive touchscreen
- + Cover plate anti riot and anti fingerprint
- + Supports vertical and horizontal screen
- + Video interface : HDMI+VGA
- + Back VESA wall mounting hole
- + Support OS: Windows/Android/Linux
- + 2-Years Warranty



Optional:


- No touch
- AG coating
- Video interface: Display Port
- Media play
- All-in-one (Android /Windows)

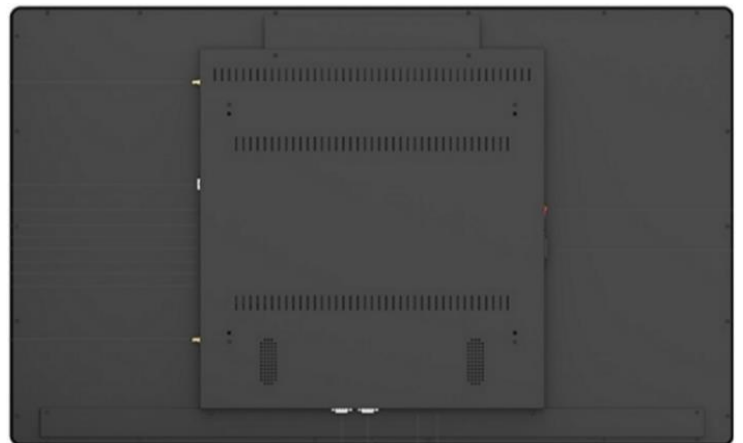

TDS5502D Digital Signage Touch Monitor Specification

Model	5502D
Color	Silver/Black
Diagonal	55 inch
Aspect ratio	16:9
Active area	1208.6X679.4(mm)
Dimensions	1268X738X55(mm)
Resolution	3840X2160UHD@60Hz
Viewing Angle	Horizontal: 89°/89°, vertical: 89°/89°
Number of Colors	1.07B
Brightness	LCD panel: 400cd/m2; Touch: 375 CD/m2
Contrast	1200:1
Response Time	8ms
Touch technology	Projective Capacitive -10 point touch
Input method	Finger, Capacitance pen(Standard) Latex gloves touch (pre commissioning required)
Light transmittance	90%
Surface hardness	7H(Mohs)
Touch interface	USB2.0
Video Interface	HDMI+VGA
Speakers	TwoX2W internal speakers
Input voltage	AC: 100-240 VAC,50/60 Hz;
Power type	Built-in AC
Sealability	Touchscreen sealed to bezel
Drop test	1kg steel ball falls from 1.2m without breaking
Weight(Unpackage)	32KG
Shipping Dimensions	1330X840X130(mm)
Operating temperature:	0°C-40°C
Storage temperature	-10°C-60°C
Humidity	Operating: 20% to 70%; Storage: 10% to 80%
VESA Mounting	400X300(mm).400X400(mm)
MTBF	50,00 Hour
Warranty	2-Years
Agency Approvals	FCC; CE; ROHS
Support OS	Windows/Linux\Android
What's in the Box	HDMI cable /USB cable /AC cable/wall mounting bracket (standard) Handwriting capacitor pen (optional)

TDS5502D-PCAP

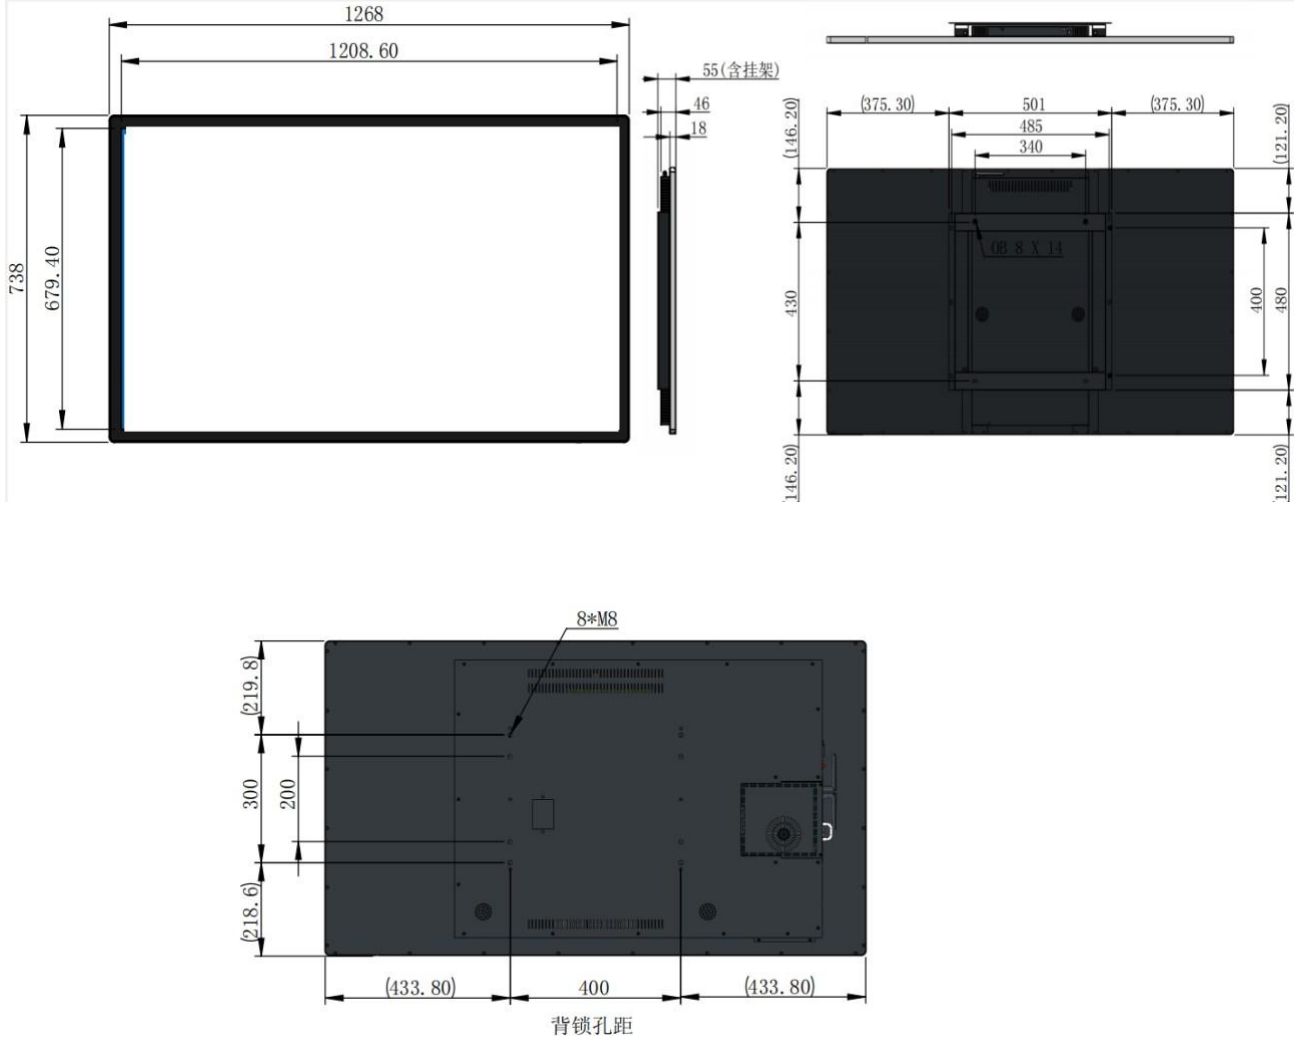

Dimensions are in millimeters

